

HER503G THRU HER508G


5.0AMPS. GLASS PASSIVATED HIGH EFFICIENT RECTIFIERS

FEATURE

- . Low leakage
- . High current capability
- . High surge capability
- . High reliability
- . High temperature soldering guaranteed
260°C /10sec / 0.375" lead length at 5 lbs tension

MECHANICAL DATA

- . Terminal: Plated axial leads solderable per MIL-STD 202E, method 208C
- . Case: Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy
- . Polarity: color band denotes cathode
- . Mounting position: any

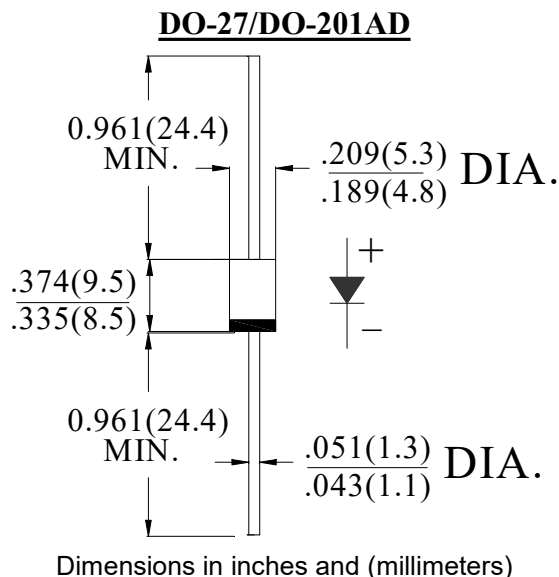

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

| Type Number | SYM BOL | HER503G | HER505G | HER508G | units |
|---|-------------|-------------|---------|---------|---------------------------|
| Maximum Recurrent Peak Reverse Voltage | V_{RRM} | 200 | 400 | 1000 | V |
| Maximum RMS Voltage | V_{RMS} | 140 | 280 | 700 | V |
| Maximum DC blocking Voltage | V_{DC} | 200 | 400 | 1000 | V |
| Maximum Average Forward Rectified Current. 375" (9.5mm) lead length | $I_{F(AV)}$ | 5.0 | | | A |
| Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method) | I_{FSM} | 120 | | | A |
| Maximum forward Voltage at 5.0A DC | V_F | 1.0 | 1.3 | 1.7 | V |
| Maximum DC Reverse Current @ $T_J=25^\circ\text{C}$ at rated DC blocking voltage @ $T_J=125^\circ\text{C}$ | I_R | 5.0 | | | μA |
| | | 100.0 | | | |
| Maximum Reverse Recovery Time (Note 1) | t_{rr} | 50 | | 75 | ns |
| Typical Junction Capacitance (Note 2) | C_J | 55 | | 32 | pF |
| Typical Thermal Resistance (Note 3) | $R_{(JA)}$ | 50 | | | $^\circ\text{C}/\text{W}$ |
| Storage Temperature | T_{STG} | -55 to +150 | | | $^\circ\text{C}$ |
| Operation Junction Temperature | T_J | -55 to +150 | | | $^\circ\text{C}$ |

Note:

1. Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$
2. Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
3. Thermal Resistance from Junction to Ambient at 0.375" (9.5mm) lead length, vertical P.C. Board Mounted.

RATING AND CHARACTERISTIC CURVES

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

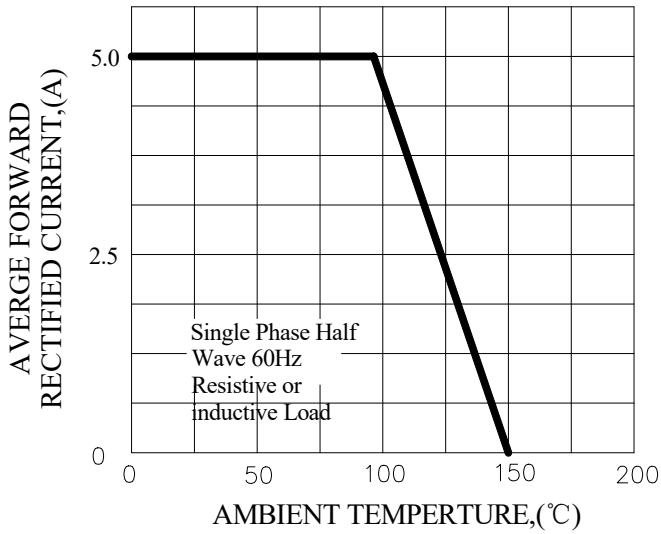


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

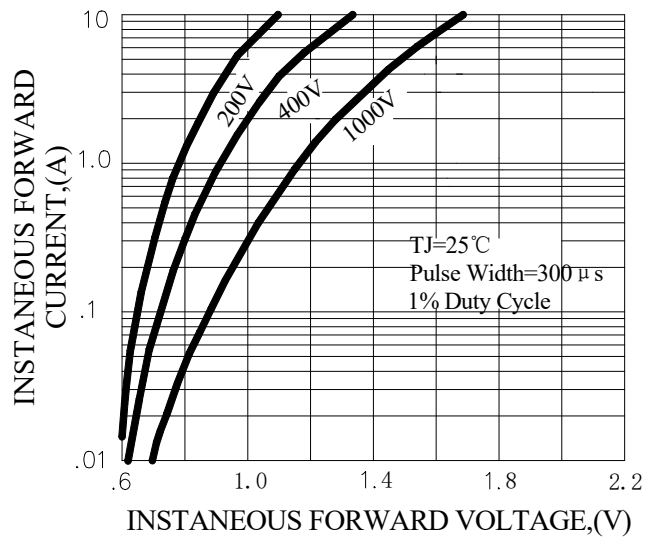


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

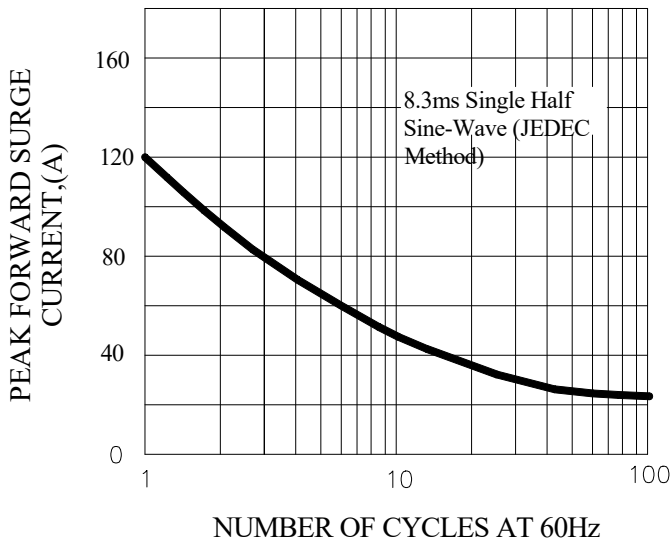


FIG.4-TYPICAL REVERSE CHARACTERISTICS


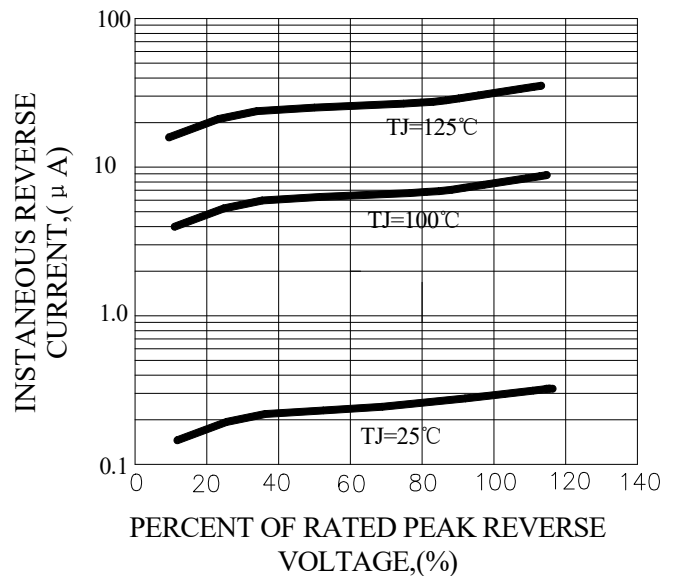



FIG.5-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

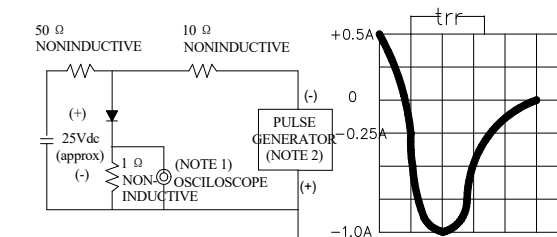

NOTES:1. Rise Time=7ns max, Input Impedance= 1 megohm.22pF.
2. Rise Time=10ns max, Source Impedance= 50 ohms.


Marking and packaging illustration

1、Marking

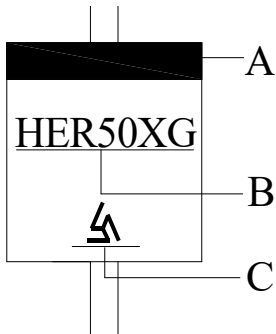

| SYMBOL | Explanation |
|--------|----------------------------|
| A | Color Band Denotes Cathode |
| B | Product Name |
| C | Trademark |

2、Packaging

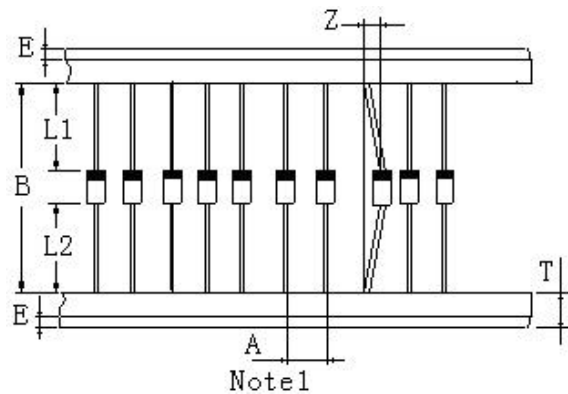

| ITEM | SYMBOL | SPECIFICATIONS (mm) | SPECIFICATIONS (inch) |
|---------------------|--------|------------------------|--------------------------|
| Component alignment | Z | 1.2max | 0.048max |
| Tape width | T | 6.0±0.4 | 0.236±0.016 |
| Exposed adhesive | E | 0.8max | 0.032max |
| Body eccentricity | L1-L2 | 1.0max | 0.040max |
| Component | A | 10.0±0.5 | 0.4±0.02 |
| Inner tap | B | 52.0~53.5 | 2.05~2.11 |

NOTE:

Each component lead shall be sandwiched between tapes for a minimum of 2.5mm (0.1inch)